
## DATA SHEET

# Aluminium Lifting Column HEAVY-DUTY/Medical Series Smooth Surface

# MAC31

**Up to 6000N** 



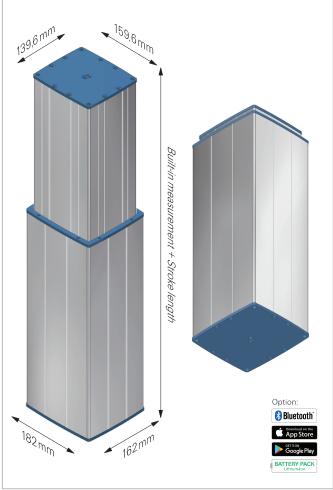

### **Strong Aluminium Lifting Column MAC31**

For the medical industry & industrial ergonomic workplaces.

MAC31 is a completely new developed lifting column, designed to meet the requirements of hygiene and quality in the medical sector and industrial workplaces. In the development, high stability and a reasonable price level were emphasized. The strong MAC31 lifting column is designed for loads up to 6000N for a single column - by lifting column systems even more. Speed up to 56mm/s (by 400N). **Plug & Play:** You can also get MAC31 as a complete Plug & Play solution, including one or more MAC31 lifting columns, a Movetec control box 110V-240VAC, all cables and a control panel. By selecting a control box with Bluetooth®, MAC31 are easily controlled by a remote control, or an iPhone® or Android®-Smartphone.

### Material specifications:

Outer profile: Anodized Aluminium Inner profile: Anodized Aluminium Friction sliders: POM Derivate Top plate: Steel Bottom plate: Steel Lifting drive parts: Aluminium, Steel, ABS, POM, PP and more

#### **Technical data:**

 $Max.\ Ioad:\ 6000\ N\ (depends\ on\ the\ stroke\ length)$ 

Max. speed without load: 56mm/sek (by 400N) (depends on force) Stroke length: 100-600\*mm/special versions up to 1000\*mm (depends on force) Dyn./static bending moment: Max.1000/2000Nm (depends on the stroke length) Min. built-in measurement/length: 224mm (by 6000N: Min. 262mm) Operation temperature: 5°C - 45°C (contact Movetes for lower and higher temperatures) Power supply/voltage: 12/24V DC/Optional 110V - 240VAC

Cable out: Cable out in the small profile/inner profile Intermittens: 10–15%

Double Hall-sensors: Yes

Top plate size: 159,6mm x 139,6mm Bottom plate size: 181,9 mm x 161,9 mm Outer profile size: 180 mm x 160 mm Inner profile size: 158 mm x 138 mm

Mounting tracks: None, smooth surface profiles Control box: More options, see www.movetec.dk

Synchronized drive: Max. 32x/16x/12x lifting columns in synchronized drive

Control panel: More options, see www.movetec.dk


**Options:** Bluetooth® controlling for iPhone®- and Android® Smartphones. Potentiometer. 12 V DC. Top- and bottom mounting plates. Cable out in the outer profile (see MAC31U). Control box with Lithium-lon battery pack. 100% brake. Small remote control. Stroke 1000mm/2000N.

\*Stroke length 100-450mm by 6000N.



# Aluminium Lifting Column HEAVY-DUTY/Medical Series Smooth Surface

**Up to 6000N** 

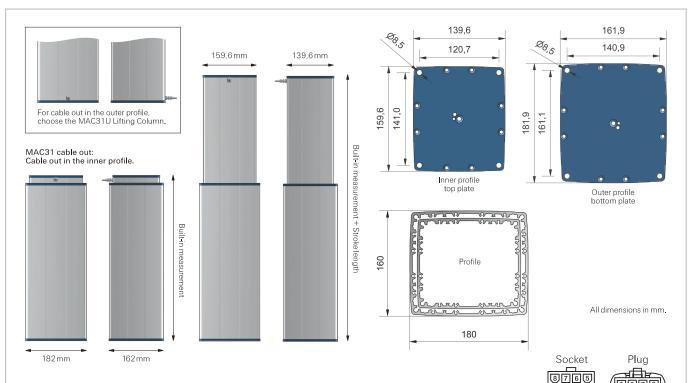

### Control boxes and control panels:

MAC31 can be used with all Movetec control boxes and Movetec control panels. Some control boxes can also be programmed for customer-specific functions - please contact us with your wishes, we are looking forward to your call: +45 64 89 28 05.

### **CAD-drawings:**

You can download 3D-drawings (STEP-Data) for MAC31 for your CAD-Program or as a PDF-file on our homepage.

### Molex plugs/connections:

Product	1	2	3	4	5	6	7	8
Color	White	Red		Green	Blue	Orange	Black	Yellow
Dual Hall	Hall 1	+5V	NC	Motor+	Ha <b>ll</b> 2	NC	Ground	Motor-

#### Manuals, installation instructions, approvals/certificates, Safety instructions etc.:

Installation manuals, assembly- and installation instructions, warnings, instructional videos and further information, can be found on our homepage: www.movetec.dk

### Lifting columns data:

Gear/drive- type no.	Load, Push N	Load, Pu <b>ll</b> N	Typ. power con- sumption by load A	Speed, without load (32 VDC) mm/s	Stroke length in mm	Built-in measurement (by stroke length 100-600mm) in mm	Max. dyn./static bending moment Nm
G29	6000	4000	5,0	6,0	100 - 450	262-762	1000-2000**
F	4500	4000	4,5	6,5	100 - 600*	262-762	1000-2000**
G	3500	3500	4,7	12,0	100 - 600*	247-747	1000-2000**
J	2000	2000	3,2	17.0	100 - 600*	224-724	1000-2000**
K	1500	1500	3,5	23,5	100 - 600*	224-724	1000-2000**
Е	400	400	2,8	56	100 - 600*	224-724	1000-2000**

<sup>\*</sup> Option: Special versions with stroke length up to 1000 mm by 2000 N available. /\*\* Depends on the construction/application in which the lifting columns are built into.







Bluetooth® is a registered trademark and are the proporty of the owner Bluetooth SIG, Inc. Android®/ Google Play® is registered trademarks and are the proporty of the owner Google Inc. Apple®/ App Store® is registered trademarks and are the proporty of the owner Apple Inc. Other trademarks and trade names are the proporty of their respective owners.

Further information \(\begin{align\*} \text{www.movetec.dk} \end{align\*}

















5678 4321

© Copyright Movetec Solutions ApS. LKD/MAC31/dat318-UK/1/100/0324



Tel. +45 64 89 28 05 · www.movetec.dk

True Innovative Moving Technology